



# KitchenEssentials™

## Refrigeration Monitoring Systems Accessories

PRODUCTS FOR EXPANDING SYSTEM CAPABILITIES

### MD-1™


The MD-1™ adds hands free occupancy detection to your walk in. Connected through low voltage wiring to your 75LC multi-monitor™.

The MD-1 will turn on and maintain your lights for the duration of your stay in the walk in using the lighting control feature provided by the 75LC multi-monitor. Adding the MD-1 will increase safety by activating hands free Auto-panic™.

No reprogramming needed, the 75LC multi-monitor's Auto-detect™ will pickup a connected MD-1 and reprogram itself for the most common settings. The MD-1 comes mounted on a standard 4x2 plate, so installation is simplified.



- **Sensing Range:** 2.5' << 40'
- **MAX current draw:** 9mA
- **Operating temperature:** (-) 20°F << (+) 122°F
- **Physical Dimensions:**  
 Motion detector (3-1/4" h x 2" w x 1-1/2" d)  
 Mounting plate (4" w x 2" h)  
 Mounting box (4" w x 2" h x 2-1/2" d)

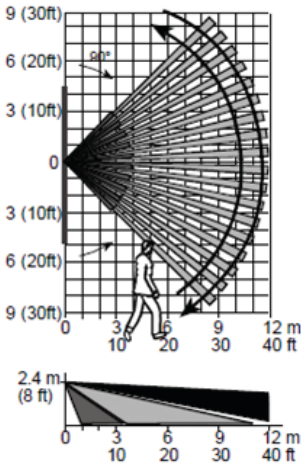


### Illuminated Push Button for Panic/Entrapment Alarm

#### IP-1

IP-1 provides light control, panic, and auto panic inside the compartment. The IP-1 includes a low-voltage pilot light inside the compartment.

For DAC-55, DL-35, 75LC



#### IP-2

IP-2 provides entrapment alarms. The IP-2 includes a low-voltage pilot light inside the compartment.

